

### BSPT 304 S/S Hex Fixed Males



**Part No.:** SSPC

**Construction:** Omega / Close Pitch

**Profile:** Medium Flexibility / Medium Pressure


**Tube Available:** 304 / 316 Stainless Steel

**Braid Available:** 304 / 316 Stainless Steel

**Size Available:** 3/4" - 2"

(Larger sizes upon Request)

**Max Temp:** 700°C

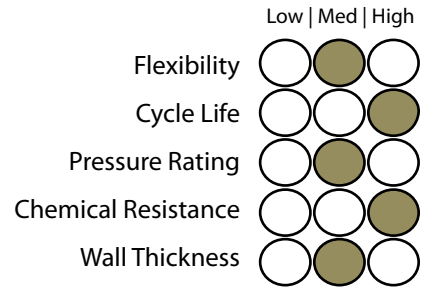

#### Construction

#### Vibration Eliminator / Pump Connector

Pump Connectors are flexible metal assemblies, primarily designed to isolate vibration from pumps on both the suction and discharge sides of the pump. They help to prevent damage caused by vibration, expansion and contraction. They accept thermal expansion and reduce piping stress due to minor misalignment. Constructed of stainless steel Omega corrugated metal and surrounded with a woven braid of high tensile stainless steel, these assemblies are flexible and are suitable to withstand high pressure and temperatures.



S/S Pump Connector – BSPT 304 S/S Hex Fixed Males				
Part Number	Size	Length	Working Pressure (kPa)	Burst Pressure (kPa)
SSPC-22643	3/4"	255mm	5003	200012
SSPC-22644	1"	255mm	4002	16008
SSPC-22645	1 1/4"	255mm	3502	14008
SSPC-22646	1 1/2"	305mm	3502	12008
SSPC-22647	2"	330mm	2501	10004

Larger sizes & M/S fittings on request please contact Pacific Hoseflex for more information

#### Applications

